



| PLAIN BEARING | SPRING / SELF-CLOSING |
|-----------------------------------|--|
| 3½ x 3½ 01 | 3½ x 3½ 10 |
| 01 Solid Brass | 4 x 4 10 Imported |
| 02 Stainless Steel 3½ x 3½ 1/16 | 4½ x 4 11 |
| 02 Fast Fit 4 x 4 03 Thin Leaf | ACCESSORIES |
| 03 Stainless Steel | Door Latch |
| 4½ x 4 | 12 Ball Latch |
| 04 | 12 Roller Latch |
| 4 x 5 04 Swing Clear | 13 Magnet Set |
| BALL BEARING | 13 Flush Bolts |
| 3½ x 3½ 05 Thin Leaf | Adjustable Strike 14 Single Adjustable Strike |
| 05 Thick Leaf | 14 Adjustable Strike |
| 06 Solid Brass | 14 Double Adjustable Strike |
| 4 x 4 06 Thin Leaf | Miscellaneous 15 Bi-Fold Hardware |
| 07 Thick Leaf | 15 Door Viewers |
| 07 Solid Brass | 15 Strike Plates |
| 08 Stainless Steel | INFORMATION |
| 4½ x 4 | Ordering |
| 08 Thick Leaf | 00 |
| 09 Stainless Steel | 16 Terms & Conditions |
| 09 Concealed | |



ORDERING

HOW-TO

Call (604) 777-0811 Fax (604) 777-0822 Toll Free 1 (800) 662-1590 Email Sales@GlobalLinks.ca

UNIT OF MEASUREMENT

All dimensions, sizes, measurements, and radii in this catalog are described using imperial units

LABELLING

Global Links product code for hinges can be broken down into 5 specific divisions:

EXAMPLE

B 350 R58 C4 A

- 1. Type B Residential Ball Bearing
- 2. *Size* **350** 3½ x 3½
- 3. Radius R58 5/8 Radius
- **4.** Finish **C4** Brass
- **5.** Packaging **A** Assembled

| 4 T | • | | | |
|---------------------------------|---|---------------------------------|--|----|
| B BB S | Plain Bearing No Designation Required Residential Ball Bearing Commercial Ball Bearing Solid Brass Spring Hinge | C10 C12 C15 C15 C26 | Satin Nickel/Nickel Plated Antique Nickel Polished Chrome | 00 |
| 350 351 440 454 450 | ze -B 350 R58 C4 A 3½ x 3½ 3½ x 31½ 4 x 4 4½ x 4 4½ x 4½ 4 x 5 Swing Clear | | Satin Chrome Zinc Plated Description Brushed Stainless Steel Polished Brass Bright Brass Antique Brass Primed White Primed/Matte Black | |
| | adius -B 350 R58 C4 A Square Corner | | kaging - B 350 R58 C4 A | |

- **A** Assembled
- **U** Un-Assembled
- P Packaged
- N Non-Removable Pin



R14 1/4 Radius

R58 5/8 Radius

R50 5/8 x Square

PLAIN BEARING

31/2 × 31/2
Thin Leaf

- Full mortise hinge made of 2.2mm steel material
- Widely used on 1-3/8" hollow or solid core wood doors




| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | C3 | C4 | C5 | СР | L1 |
|--------------|--------|-------------|----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|
| 350R14 A | 1/4 | Assembled * | 100 each | • | • | • | • | • | • | • | | • | • | • | | • |
| 350R14 U | 1/4 | Unassembled | 100 each | • | • | • | • | • | • | • | | • | • | • | | • |
| 350R58 A | 5/8 | Assembled * | 100 each | • | • | • | • | • | • | • | | • | • | • | | • |
| 350R58 U | 5/8 | Unassembled | 100 each | • | • | • | • | • | • | • | | • | • | • | | • |
| 350R00 A | SQ | Assembled * | 100 each | • | | • | | | • | • | | | • | | | • |

* Retail Packaging Available

01

31/2 x 31/2 Solid Brass

- Full mortise hinge made of 2.5 mm solid brass material
- Widely used on 1-3/8" hollow or solid core wood doors

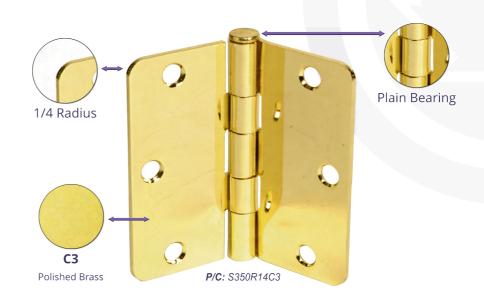


| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 |
|--------------|--------|----------------|------------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|
| S350R14C3 | 1/4 | Packaged 1Pł | < 100 each | | | | | | | | | • | | | | |
| S350R58C3 | 5/8 | Packaged 1Ph | K 100 each | | | | | | | | | • | | | | |



PLAIN BEARING

3½ x **3**½ Stainless Steel


- Full mortise hinge made of 2.2 mm steel material
- Widely used on 1-3/8" hollow or solid core wood doors
- Brushed stainless steel

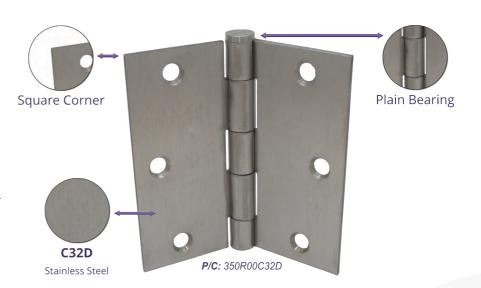

| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 |
|--------------|--------|-----------|----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|
| 350R00C32D | SO | Assembled | 100 each | | | | | | | | • | | | | | |

31/2 × 311/16
Fast Fit

- Full mortise hinge made of 2.2mm steel material
- Widely used on 1-3/8" hollow or solid core wood doors
- Referred to as *Fast Fit* hinge

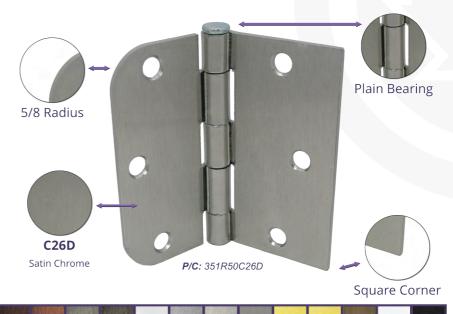

| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 | |
|--------------|----------|----------------|----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|--|
| 351R50 A | 5/8 x SQ | Assembled | 100 each | | | • | | | • | • | | | • | | | • | |
| 351R50 P3 | 5/8 x SQ | Packaged 3Ph | 100 each | | | • | | | • | • | | | • | | | • | |



- Full mortise hinge made of 2.5mm steel material
- Widely used on 1-3/4" steel insulated doors



| F | Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | C3 | C4 | C5 | СР | L1 |
|---|--------------------|-----------|-------------|----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|
| 4 | 440R14 A | 1/4 | Assembled * | 100 each | • | • | • | • | • | • | • | | • | • | • | | • |
| 4 | 440R14 U | 1/4 | Unassembled | 100 each | • | | • | • | • | • | • | | • | • | • | | • |
| 4 | 440R14 NRP | 1/4 | Assembled | 100 each | • | • | • | • | • | • | • | | • | • | • | | • |
| | 440R58 A | 5/8 | Assembled * | 100 each | • | • | • | • | • | • | • | | • | • | • | • | • |
| 4 | 440R58 U | 5/8 | Unassembled | 100 each | • | | • | • | • | • | • | | • | • | • | | • |
| 4 | 440R58 NRP | 5/8 | Assembled | 100 each | • | • | • | • | • | • | • | | • | • | • | • | • |
| 4 | 440R50 A | 5/8 x SQ | Assembled | 100 each | • | | • | • | • | • | • | | | • | | | • |
| 4 | 440R50 U | 5/8 x SQ | Unassembled | 100 each | • | | • | • | • | • | • | | | • | | | • |
| | 440R50 NRP | 5/8 x SQ | Assembled | 100 each | • | | • | • | | • | • | | | • | | • | • |
| | 440R00 A | SQ | Assembled | 100 each | • | | • | | • | • | | | | | | | • |
| * | Retail Packaging A | Available | | | | | | | | | | | | | | | |

4 × 4
Stainless Steel

03

- Full mortise hinge made of 2.5 mm stainless steel material
- Widely used on 1-3/8" steel insulated doors

Radius

5/8

Packaging

Assembled

Assembled

Assembled

Assembled

• Stainless steel pin





Product Code

440R14C32D NRP

440R58C32D NRP 5/8


440R14C32D

440R58C32D

PLAIN BEARING

41/2 X 4 Commercial Thick Leaf

- Full mortise template hinge made of 3.4 mm steel material
- Widely used on average and low frequency hollow, solid core wood or steel doors
- · Standard weight
- Meets "ANSI" standards

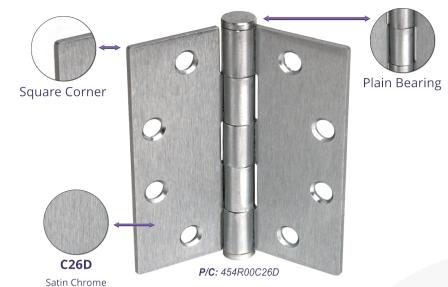


| | Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | C3 | C4 | C5 | СР | L1 |
|---|----------------------|----------|----------------------------------|----------|------|-----|-----|------|-----|------|-----|------|----|----|-----|-------|----|
| 7 | 454R00 454R00 NRP | SQ SQ | Packaged 3Ph Packaged 3Ph | | | | | | | • | | | | | | | |
| | | · | | | | | | | | | | | | | 1/4 | Radiu | S |





3½ × 3½ Residential Thin Leaf

- Full mortise hinge made of 2.2mm steel material
- Widely used on 1-3/8" hollow or solid core wood doors

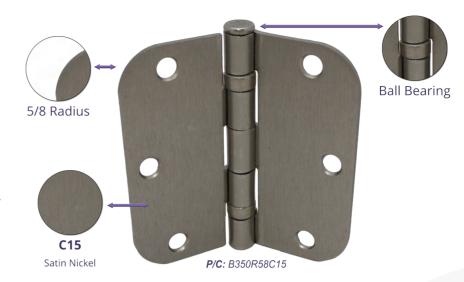


| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 |
|--------------|--------|-----------|----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|
| B350R14 | 1/4 | Assembled | 100 each | • | | • | | • | • | | | | | | | • |
| B350R58 | 5/8 | Assembled | 100 each | • | | • | | • | • | | | | | | | • |

05

3½ × 3½

Commercial Thick Leaf

- Full mortise hinge made of 3.0 mm steel material
- Widely used on 1-3/8" solid core wood doors

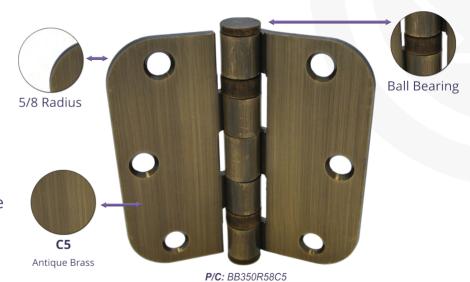


| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 |
|--------------|--------|---------------|-----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|
| BB350R14 | 1/4 | Packaged 2P | K 50 each | • | | • | • | • | • | | | • | | • | | • |
| BB350R58 | 5/8 | Packaged 2P | K 50 each | • | • | • | • | • | • | | | • | | • | | • |
| BB350R00 | SQ | Packaged 2P | K 50 each | • | | | • | • | • | | | | | | | • |



3½ × **3**½ Solid Brass


- Full mortise hinge made of 2.5 mm solid brass material
- Widely used on 1-3/8" hollow or solid core wood doors
- Twist off button tips for easy upgrading to ball or steeple tips
- Stainless steel pin

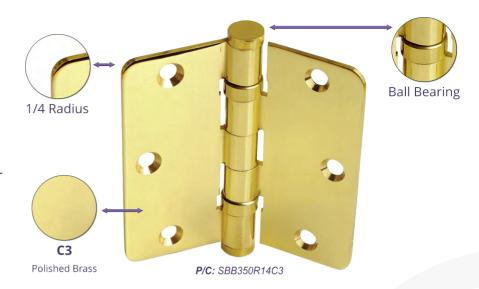

| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | CP | L1 | |
|--------------|--------|-----------|----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|--|
| SBB350R14C3 | 1/4 | Assembled | 100 each | | | | | | | | | • | | | | | |
| SBB350R58C3 | 5/8 | Assembled | 100 each | | | | | | | | | • | | | | | |



- Full mortise hinge made of 2.5mm steel material
- Widely used on 1-3/8" steel insulated doors

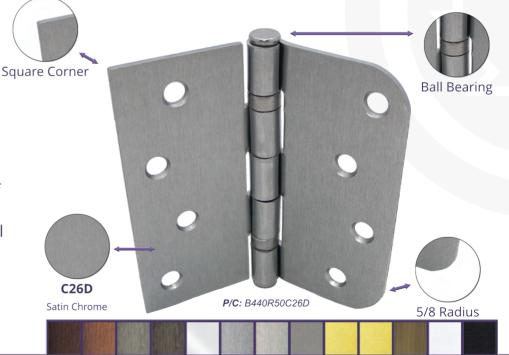

| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 |
|--------------|----------|-----------|----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|
| B440R14 | 1/4 | Assembled | 100 each | • | | • | | • | • | | | | • | | | • |
| B440R14 NRP | 1/4 | Assembled | 100 each | | | • | | • | • | | | | • | | | • |
| B440R58 | 5/8 | Assembled | 100 each | • | | • | | • | • | | | | • | | | • |
| B440R58 NRP | 5/8 | Assembled | 100 each | • | | • | | • | • | | | | • | | | • |
| B440R50 | 5/8 x SQ | Assembled | 100 each | | | • | | | • | | | | | | | |
| B440R50 NRP | 5/8 x SO | Assembled | 100 each | | | • | | | • | | | | | | | |



4 × 4

Commercial Thick Leaf

- Full mortise hinge made of 3.3 mm steel material
- Widely used on 1-3/4" solid core wood or steel insulated doors




| F | Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 |
|---|--------------|----------|---------------|------------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|
| | BB440R14 | 1/4 | Packaged 3P | °K 48 each | • | • | • | • | • | • | | | • | | • | | • |
| | BB440R14 NRP | 1/4 | Packaged 3P | K 48 each | • | | • | • | • | • | | | • | | • | | • |
| | BB440R58 | 5/8 | Packaged 3P | K 48 each | • | | • | • | • | • | | | • | | • | | • |
| | BB440R58 NRP | 5/8 | Packaged 3P | K 48 each | • | | • | • | • | • | | | • | | • | | • |
| | BB440R50 NRP | 5/8 x SQ | Bulk | 48 each | | | | | | • | | | | | | | |
| | BB440R00 | SQ | Packaged 3P | K 48 each | • | | • | | • | • | | | | | | | • |
| | BB440R00 NRP | SQ | Packaged 3P | K 48 each | • | | • | | • | • | | | | | | | |

07

4 X 4
Solid Brass

- Full mortise hinge made of 3.0 mm solid brass material
- Widely used on 1-3/4" hollow, solid core or steel insulated doors
- Twist off button tips for easy upgrading to ball or steeple tips
- Stainless steel pin

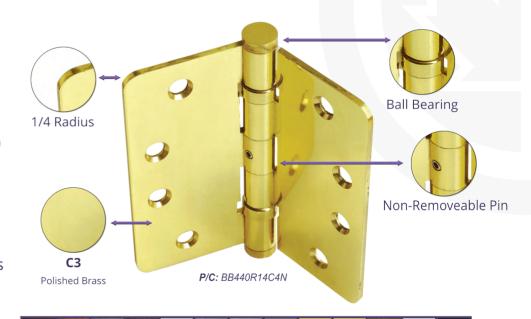


| | | | | | | | | | | | H239350 | | | | | |
|----------------|--------|-----------|----------|------|-----|-----|------|-----|------|-----|---------|----|----|----|----|----|
| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 |
| SBB440R14C3 | 1/4 | Assembled | 100 each | | | | | | | | | • | | | | |
| SBB440R14C3NRP | 1/4 | Assembled | 100 each | | | | | | | | | • | | | | |
| SBB440R58C3 | 5/8 | Assembled | 100 each | | | | | | | | | • | | | | |
| SBB440R58C3NRP | 5/8 | Assembled | 100 each | | | | | | | | | • | | | | |



4 × 4 Stainless Steel


- Full mortise hinge made of 3.3 mm steel material
- Widely used on 1-3/4" hollow, solid core or steel insulated doors
- Stainless steel pin

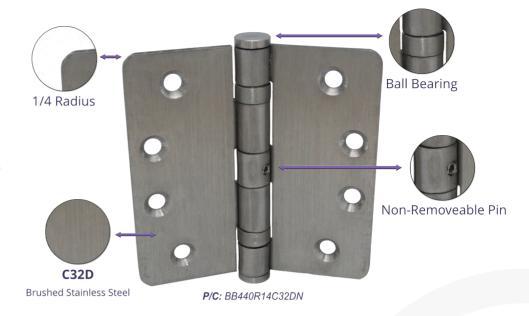

| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 | |
|----------------|--------|---------------|------------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|--|
| BB440R14C32D | 1/4 | Packaged 3F | PK 48 each | | | | | | | | • | | | | | | |
| BB440R14C32D N | RP 1/4 | Packaged 31 | PK 48 each | | | | | | | | • | | | | | | |
| BB440R58C32D | 5/8 | Packaged 31 | PK 48 each | | | | | | | | • | | | | | | |
| BB440R58C32D N | RP 5/8 | Packaged 3F | PK 48 each | | | | | | | | • | | | | | | |

41/2 X 4
Commercial Thick Leaf

- Full mortise template hinge made of 3.4 mm steel material
- Widely used on average and low frequency hollow, solid core wood or steel doors
- Standard weight
- Meets "ANSI" standards

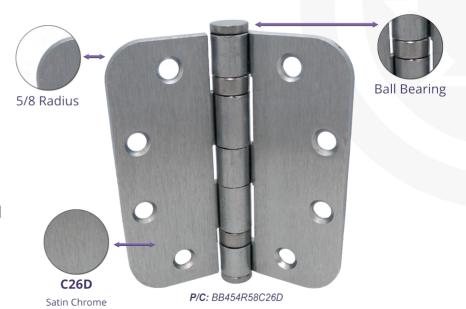

| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 | |
|--------------|--------|---------------|------------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|--|
| BB454R58 | 5/8 | Packaged 3F | PK 48 each | | | | | | • | | | | | | | | |
| BB454R58 NRP | 5/8 | Packaged 3F | PK 48 each | | | | | | • | | | | | | | | |
| BB454R00 | SQ | Packaged 3F | PK 48 each | • | | • | | • | • | | | | • | | | • | |
| BB454R00 NRP | SQ | Packaged 3F | PK 48 each | • | | • | | • | • | | | | • | | | • | |



4½ × 4

Stainless Steel

- Full mortise template hinge made of 3.4 mm stainless steel material
- Widely used on hollow or solid core wood, steel insulated or commercial steel doors
- · Standard weight
- Meets "ANSI" standards
- Stainless steel pin




| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | C3 | C4 | C5 | СР | L1 |
|----------------|--------|---------------|-----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|
| BB454R00C32D | SQ | Packaged 3P | K 48 each | | | | | | | | • | | | | | |
| BB454R00C32DNF | RP SO | Packaged 3P | K 48 each | | | | | | | | • | | | | | |

09

4¹/₂ × 4 Concealed Bearing

- Full mortise template hinge made of 3.4 mm steel material
- Widely used on average and low frequency hollow, solid core wood or steel doors
- 3 knuckle hinge for a more streamlined look
- Standard weight
- Meets "ANSI" standards

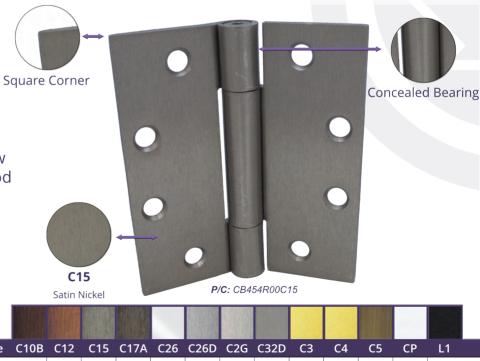


| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 | |
|--------------|--------|---------------|-----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|--|
| CB454R00 | SQ | Packaged 3F | K 48 each | • | | • | | • | • | | | | | | | | |
| CB454R00 NRP | SQ | Packaged 3F | K 48 each | • | | • | | • | • | | | | | | | | |



SPRING / SELF-CLOSING

$3\frac{1}{2} \times 3\frac{1}{2}$ Imported | UL Listed

- Full mortise spring hinge
- Widely used on wood or steel doors in residential, apartment, hotel, motel, office, and public buildings

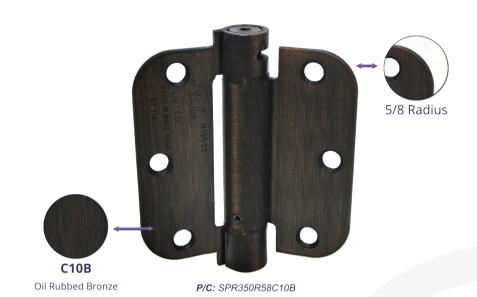

| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | CP | L1 | |
|--------------|--------|---------------|-----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|---|
| SPR350R14 | 1/4 | Packaged 1F | K 50 each | • | | • | | | • | | | | • | | | • | Ī |
| SPR350R58 | 5/8 | Packaged 1F | K 50 each | • | | • | | | • | | | | • | | | • | |

4 × 4
Imported | UL Listed

- Full mortise spring hinge
- Widely used on wood or steel doors in residential, apartment, hotel, motel, office, and public buildings



| Product Code | Radius | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 |
|---------------|----------|---------------|-----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|
| SPR440R14 | 1/4 | Packaged 1P | K 50 each | • | | • | • | • | • | | | • | • | • | | • |
| SPR440R58 | 5/8 | Packaged 1P | K 50 each | • | | • | • | • | • | | | • | • | • | | • |
| SPR440R50 L/R | 5/8 x SQ | Bulk | 50 each | • | | • | • | • | • | | | | • | | | • |



10

For any special requests please contact us.


Phone (604) 777-0811 | Fax (604) 777-0822 | Toll Free 1 (800) 662-1590

Email Sales@GlobalLinks.ca | Website GlobalLinks.ca

SPRING / SELF-CLOSING

41/2 × 4
Imported | UL Listed

- Full mortise spring hinge
- Widely used on wood or steel doors in residential, apartment, hotel, motel, office, and public buildings
- Standard weight

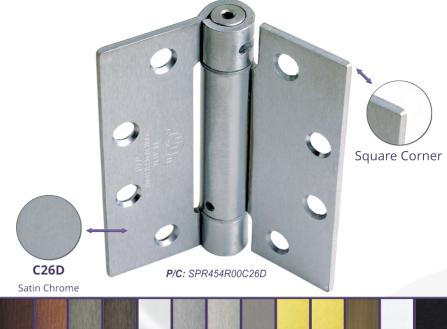

 Product Code
 Radius
 Packaging
 Per Case
 C10B
 C12
 C15
 C17A
 C26
 C26D
 C2G
 C32D
 C3
 C4
 C5
 CP
 L1

 SPR454R00
 SQ
 Packaged
 1PK
 50 each
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •</td

11

Parts For Spring Hinges

- Tension Pins
- Tension Sets
- Spare parts to be used on our Imported Spring Hinges

Product Code Description

SPRTENPIN Tension Pin (/M) - 1,000 per Bag
SPTension Set Tension Set - 2 Tension Pins, Allan Key, Tension Bar Set



BALL LATCH

Drive-In/Face Plate Ball Latch



- Steel roller
- Full strike plate



- 1 x 2-1/4 Face Pate
- Steel roller
- Full strike plate

| Product Code | Packaging | Per Box | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | CP | L1 | |
|--------------|-----------|---------|----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|--|
| BC | Bulk | 25 each | 100 each | • | | • | • | • | • | | | | • | | | • | |
| BLC | Bulk | 25 each | 100 each | • | | • | • | | • | | | | • | | | | |

12

ROLLER LATCH

- Nylon roller
- 1" x 2-1/4" face plate
- Full strike plate



P/C: RLC26D

| | | | | A HARRY | | | THE PARTY | | | (315)/(6) | | | | ************************************** | | |
|--------------|-----------|---------|----------|---------|-----|-----|-----------|-----|------|-----------|------|----|----|--|----|----|
| | | | | | | | | | | | | | | | | |
| Product Code | Packaging | Per Box | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 |
| RLC | Bulk | 25 each | 100 each | | | | • | • | • | | | | • | | | • |



1" Magnet Set

- 1" magnet catch set (2 rare earth magnets, 2 cups, and 2 plates)
- Maximum direct-pull strength is 80 pounds



Product Code F

Packaging

Per Box Per Case

25 sets

100 sets

11 Flush Bolt

6 Inch



P/C: 6FBC3

- Superior quality, smooth working
- Deep cup finger hole and double action spring for ease of operation
- Automatic holding of bolt in either projected or retracted position

12 Inch




- Used as top or bottom flush bolt
- For inactive leaf of a pair of swinging fire doors

P/C: 12FBC26D

| Product Code | Packaging | Per Box | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 |
|--------------|----------------|---------|----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|
| 6FB | Packaged 1Pk | 25 each | 100 each | • | • | • | • | • | • | | | • | • | | | • |
| 12FB | Packaged 2Pk | (| 80 each | | | | | | • | | | | | | | |



Single Adjustable Strike

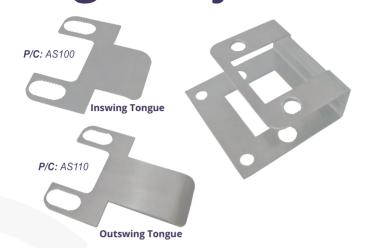

- Available in C26D finish
- Comes with either an Inswing(AS100) or Outswing(AS110) tongue
- 100 per Case

Adjustable Strike

- For 3/4" jamb
- Supplied with standard and extended clip
- Available in C26D and C4 finishes
- 100 per Case, 10 per Box




Double Adjustable Strike

• 5½" center to center Double Adjustable Striker Plate

 Comes with either an Inswing(ASD) or Outswing(ASDO) tongue

Available in C10B, C15, C17A,
 C26D, and L1 finishes

• 40 per Case

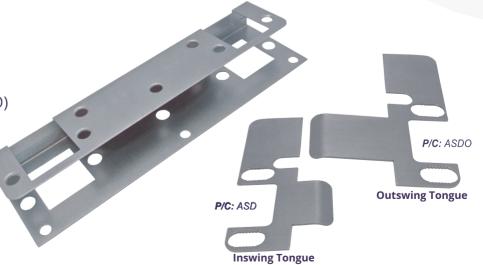



Bi-Fold Hardware



- Use on 2-panel bifold door
- Polybag hardware set with instructions

P/C: BFH2P



• Bi-Fold Hinge

• Size: 1-5/8 x 2-1/2

Product Code

Packaging

Per Case

BFC2G

Bags | 1 Set

50 each 250 each

Door Viewer





• 180 degree angle of vision

Glass lens

Per Box Per Case C10B C12 C15 C17A C26 C26D C2G C32D **Product Code** Packaging 200 each

Strike Plates

- Small and Big plates
- Small Plates (BCSP): 1-3/8 x 2-1/4
- Big Plates (DSP): 1-3/4 x 2-1/4



| Product Code | Packaging | Per Case | C10B | C12 | C15 | C17A | C26 | C26D | C2G | C32D | С3 | C4 | C5 | СР | L1 |
|--------------|-----------------|----------|------|-----|-----|------|-----|------|-----|------|----|----|----|----|----|
| BCSP | Bags 100 each | 500 each | • | | • | • | | • | | | | • | • | | |
| DSP | Bags 100 each | 500 each | | | | | | | | | | | | | |



TERMS & CONDITIONS

ACCEPTANCE OF ORDER

We reserve the right to decline an order, in whole or in part.

FREIGHT

All orders are F.O.B. our warehouses. Call for prepaid policy in your area.

PRICES

Prices are subject to change without notice. All errors and omissions are subject to correction.

CREDIT APPROVAL / INCREASE

Acceptance of all orders is subject to approval by Global Links. Trade references and banking information must accompany orders from new accounts. An increase in credit may be denied if payments haven't previously been made within terms.

PAST DUE ACCOUNTS

Invoices not paid within our terms will be subject to a service charge of 2% per month. A 24% per annum service charge will be added and compounded each month, thereafter until said amount is collected. Past due payments are not eligible for discount. All goods remain the property of Global Links until invoice paid.

RETURN OF MERCHANDISE

No merchandise may be returned to Global Links without a designated RGA number. All returns must be shipped prepaid within 30 days and are subject to a minimum 20% restocking charge. The merchandise must be in saleable condition or no credit will be issued.

FREIGHT AND SHORTAGE CLAIMS

Goods in transit are at purchaser's risk. Claims for damaged goods or shortages must be reported to the delivery carrier within 5 business days. Shortage claims must be made to Global Links within 5 working days from receipt of shipment and are subject to verification.

PRODUCT WARRANTY

Our products are guaranteed to be free of defects in both workmanship and materials for a period of one year. This warranty does not cover defects or damage arising from improper installation, lack of or improper maintenance, improper storage, shipping and handling, ordinary wear and tear, misuse, abuse, accident, unauthorized service, or use with unauthorized products or parts. Any modification of product after leaving our warehouse will void the warranty. Liability shall be limited to the replacement of product. Cost of replacement shall not exceed original purchase price.

Written notice of damages must occur within the warranty period. The defective goods must be returned to our warehouse in Delta, BC, unless specified otherwise.

FINISHES AS SHOWN IN CATALOG

Actual finish colors may vary from colors shown in this catalog. Reflective/Mirror finishes such as C12, C3, C3-4, and C26 will appear different in person. Finishes can be verified by ordering a sample.



THANK YOU!

We would not be here without you! The support from all of our customers throughout the years has been beyond amazing and we'd like to thank you for supporting us!